

Datenblatt: Industrie-Monitore IP54

Diese Industrie-Monitore haben ein Stahlblech-Gehäuse und entsprechen der Schutzklasse IP54. Sie können „Stand-alone“ in Maschinen oder Geräte eingebaut, oder an die Wand montiert werden. Also ein industrieller Monitor mit Metall-Gehäuse und noch „staub und spritzwassergeschützt“.

Unsere Industrie-Monitore gibt es in verschiedenen Größen und Formaten:

Stahlblech-Gehäuse

16:9 Format: von 32“ bis 65“

Touchscreen (optional)

Helligkeiten von 400 cd/m² bis zu 500 cd/m²

Schutzklasse IP54


Zugelassen für 24 Stunden täglich und 7 Tage die Woche!



Datenblatt: Disp_IP54_32

Specification

Display	Viewing Size Image	32"
	Active Display Area (mm)	698.4 (H) x 392.85 (V)
	Pixel Pitch (mm)	0.3638 (H) x 0.3638 (V)
	Resolution	1920 x 1080
	Contrast Ratio	1100 : 1 (typ.)
	Color	16.7 M
	Brightness	400 cd/m ²
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1920 x 1080 @ 60Hz
	Signal Connector	VGA, DVI, HDMI

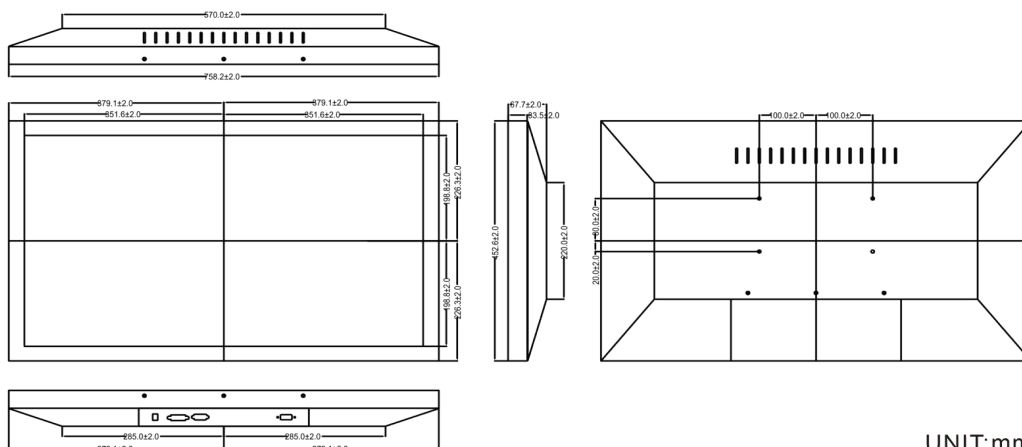


Power	Source	100 ~ 240VAC power cord
	Consumption	41W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	PCAP, IR
	High Brightness	1000, 1500
	Auto Dimming	YES
	Power in	DC24V, DC9V~36V
	Remote Control	YES
	IO	AV, DP

Datenblatt: Disp_IP54_43

Specification

Display	Viewing Size Image	43"
	Active Display Area (mm)	941.18 (H) x 529.42 (V)
	Pixel Pitch (mm)	0.4902 (H) x 0.4902 (V)
	Resolution	1920 x 1080
	Contrast Ratio	1100 : 1 (typ.)
	Color	16.7 M
	Brightness	450 cd/m ²
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1920 x 1080 @ 60Hz
	Signal Connector	VGA, DVI, HDMI

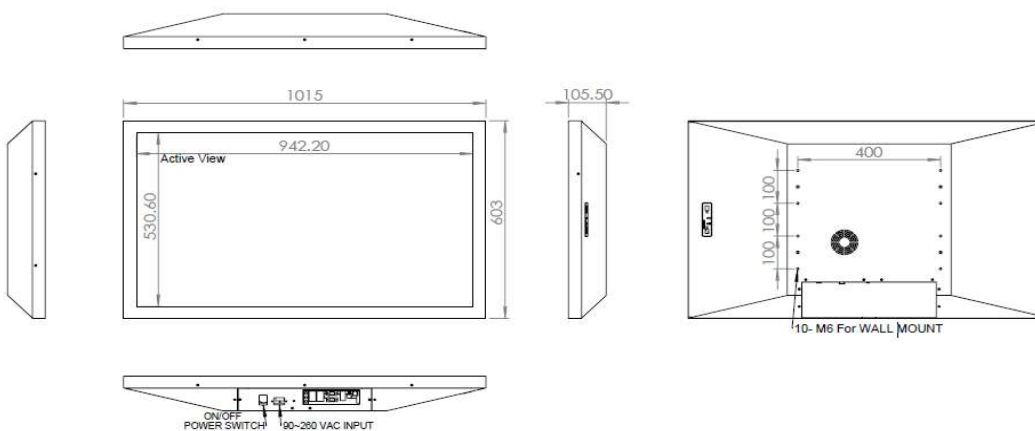

Power	Source	100 ~ 240VAC power cord
	Consumption	49.28W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	PCAP, IR
	High Brightness	1000, 1500
	Auto Dimming	YES
	POWER in	DC24V
	Remote Control	YES
	IO	AV, DP



Datenblatt: Disp_IP54_46

Specification

Display	Viewing Size Image	46"
	Active Display Area (mm)	1018.08 (H) x 572.67 (V)
	Pixel Pitch (mm)	0.53025 (H) x 0.53025 (V)
	Resolution	1920 x 1080
	Contrast Ratio	4000 : 1 (typ.)
	Color	16.7 M
	Brightness	450 cd/m ²
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1920 x 1080 @ 60Hz
	Signal Connector	VGA, DVI, HDMI



UNIT : mm

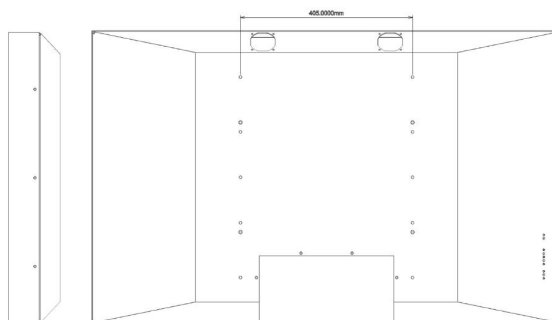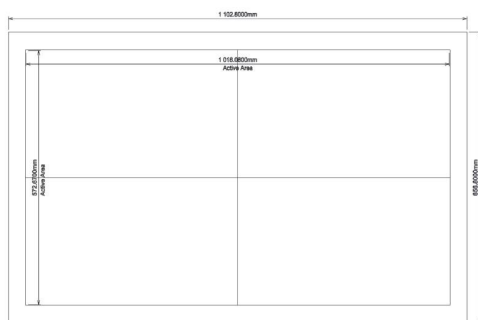


Power	Source	100~240VAC power cord
	Consumption	92W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	PCAP, IR
	High Brightness	1000, 1500
	Auto Dimming	YES
	POWER in	DC24V
	Remote Control	YES
	IO	AV, DP

Datenblatt: Disp_IP54_55

Specification

Display	Viewing Size Image	55"
	Active Display Area (mm)	1209.6 (H) x 680.4 (V)
	Pixel Pitch (mm)	0.63 (H) x 0.63 (V)
	Resolution	1920 x 1080
	Contrast Ratio	4000 : 1
	Color	1073.7M (10bits/color)
	Brightness	500 cd/m ²
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1920 x 1080 @ 60Hz
	Signal Connector	VGA, DVI, HDMI


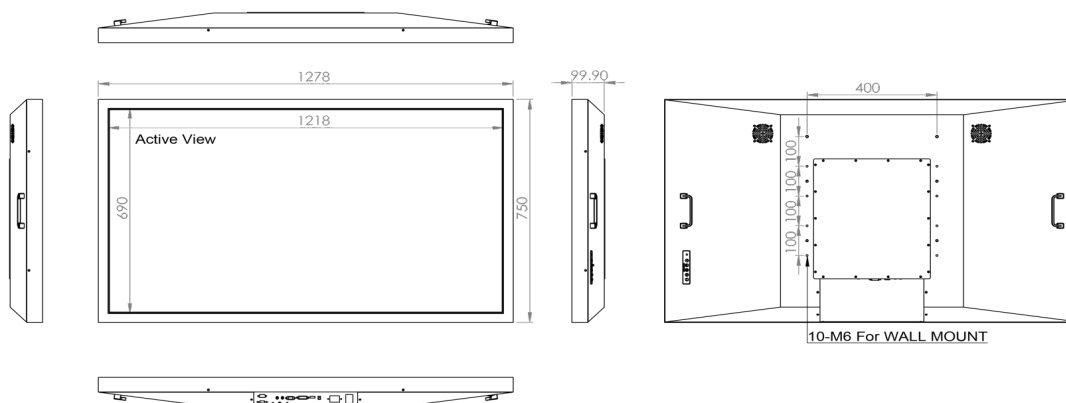


Power	Source	100 ~ 240VAC power cord
	Consumption	118W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	PCAP, IR
	High Brightness	1000, 1500
	Auto Dimming	YES
	POWER in	DC24V
	Remote Control	YES
	IO	AV, DP

Datenblatt: Disp_IP54_65

Specification

Display	Viewing Size Image	65"
	Active Display Area (mm)	1428.48 (H) x 803.52 (V)
	Pixel Pitch (mm)	0.744 (H) x 0.744 (V)
	Resolution	1920 x 1080
	Contrast Ratio	4000 : 1
	Color	1073.7M (10bits/color)
	Brightness	500 cd/m ²
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1920 x 1080 @ 60Hz 10bit 1.07B
	Signal Connector	VGA, DVI, HDMI

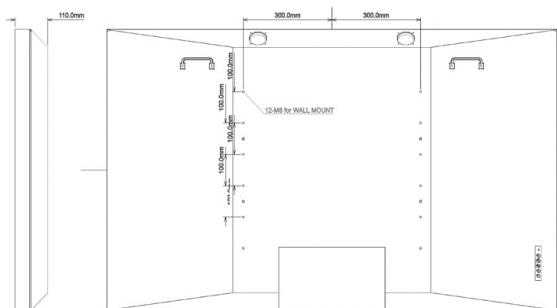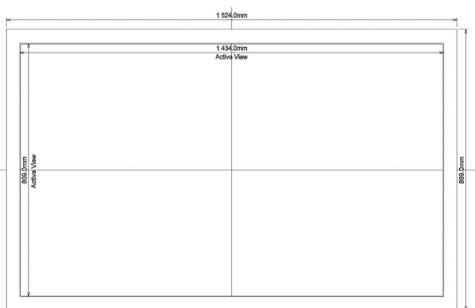

Power	Source	100V ~ 240VAC power cord
	Consumption	201W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch	PCAP, IR
	High Brightness	1000, 1500
	Auto Dimming	YES
	POWER in	24V,
	Remote Control	YES
	IO	AV, DP